



KT09L 管式连接





KT09B 板式连接

技术参数 微动开关通过UL和CSA认证

最高电压	250VAC	30VDC
最大电流	3A	4A
精度	1%	
机械寿命	100万次	
最高耐压	500bar	
防护等级	IP65	
开关切换频率	80次/分钟	
介质	非腐蚀性液体	
介质粘度	10-800(cst)	
可调压力范围	70: 5~70bar (70~1000psi) 150: 10~150bar (150~2200psi) 250: 25~250bar (350~3500psi) 400: 30~400bar (450~6000psi)	Pmax=200bar Pmax=400bar Pmax=400bar Pmax=500bar
连接	P = 1/4"PT 内螺纹 N = 1/4"NPT 内螺纹	B = 1/4"BSP 内螺纹 T:板式连接

订货说明：KT09-L(连接方式)-150（压力范围）-P(连接螺纹)

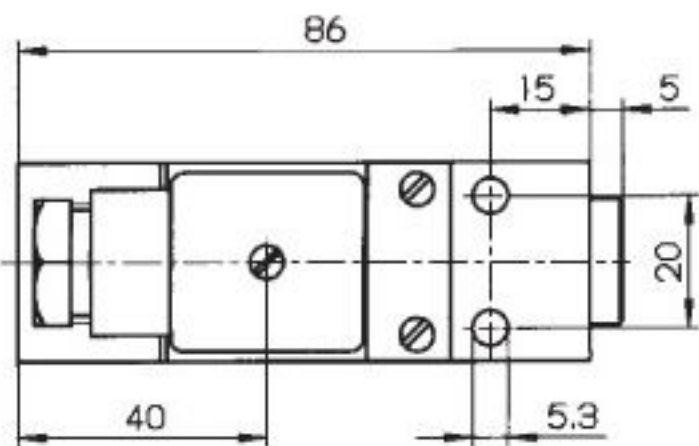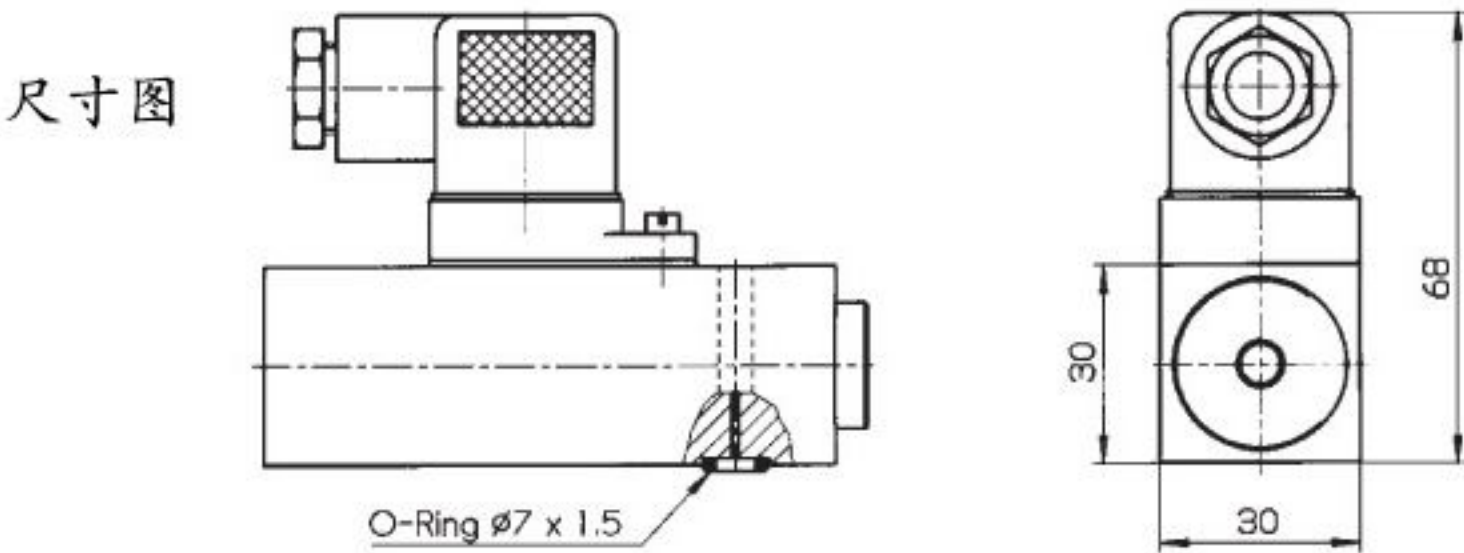

接线图

